

OSP.XC

Vented lead-acid battery

Telecom/IT Battery Systems

AGV Battery Systems

Motive Power Systems

Railway Battery Systems

Power Supply

Standby



Product features

⇔ customer benefits

- 3D structured electrode
 - ⇔ ability to accept high-current loadings
 - ⇔ long service life
- Maximum energy density
 - ⇔ small footprint
- System terminal / system connector
 - ⇔ exclude corrosion
 - ⇔ prevent short-circuits even during installation
- AquaGen® recombimator (optional)
 - ⇔ extremely long intervals between topping-up with water, even total freedom from maintenance


Applications

- Power plants
- Switching stations
- UPS units

OSP.XC Type Overview

Capacities, Dimensions and Weights

Type	C ₁₀ /1.80 V Ah	C ₅ /1.75 V Ah	C ₃ /1.70 V Ah	C ₁ /1.65 V Ah	Weight kg	Weight electrolyte 1.27 kg/l kg	Length L mm	Width B mm	Height H mm
3 OSPXC 120	132	109	98	76	15.9	5.4	105	208	420
4 OSPXC 160	176	145	131	102	17.5	5.1	105	208	420
5 OSPXC 200	220	181	164	127	19.3	4.9	105	208	420
6 OSPXC 240	264	218	196	152	22.9	6.2	126	208	420
7 OSPXC 280	308	254	229	178	24.5	6.0	126	208	420
8 OSPXC 320	352	290	262	203	28.0	7.2	147	208	420
4 OSPXC 380	406	360	321	225	40.6	15.6	147	208	710
5 OSPXC 475	507	450	401	281	43.7	15.1	147	208	710
6 OSPXC 570	609	540	481	337	47.1	14.7	147	208	710
7 OSPXC 665	710	630	561	394	50.1	14.1	147	208	710
8 OSPXC 760	812	720	641	450	53.7	13.6	147	208	710
9 OSPXC 855	913	810	721	506	66.9	18.7	215	193	710
10 OSPXC 950	1015	900	801	562	69.9	18.1	215	193	710
11 OSPXC 1045	1116	990	881	619	73.3	17.7	215	193	710
12 OSPXC 1140	1218	1080	962	675	83.7	23.0	215	235	710
13 OSPXC 1235	1319	1170	1042	731	87.7	22.5	215	235	710
14 OSPXC 1330	1420	1260	1122	787	90.6	22.1	215	235	710
15 OSPXC 1425	1522	1350	1202	844	100.8	27.3	215	277	710
16 OSPXC 1520	1623	1440	1282	900	104.4	26.8	215	277	710
17 OSPXC 1615	1725	1530	1362	956	107.4	26.5	215	277	710
15 OSPXC 1725	1740	1511	1338	916	123.5	32.9	215	277	855
16 OSPXC 1840	1856	1611	1427	977	127.5	32.4	215	277	855
17 OSPXC 1955	1973	1712	1517	1038	131.1	32.0	215	277	855
18 OSPXC 2070	2089	1813	1606	1099	163.2	51.1	215	400	815
20 OSPXC 2300	2321	2014	1784	1221	174.9	49.2	215	400	815
24 OSPXC 2760	2785	2417	2141	1465	213.4	64.3	215	490	815
26 OSPXC 2990	3017	2619	2319	1588	221.0	63.4	215	490	815
28 OSPXC 3220	3249	2820	2498	1710	228.8	62.2	215	490	815
30 OSPXC 3450	3481	3021	2676	1832	254.6	74.5	215	580	815
32 OSPXC 3680	3713	3223	2855	1954	262.7	73.1	215	580	815
34 OSPXC 3910	3945	3424	3033	2076	270.8	71.8	215	580	815
36 OSPXC 4140	4177	3626	3211	2198	278.1	71.0	215	580	815

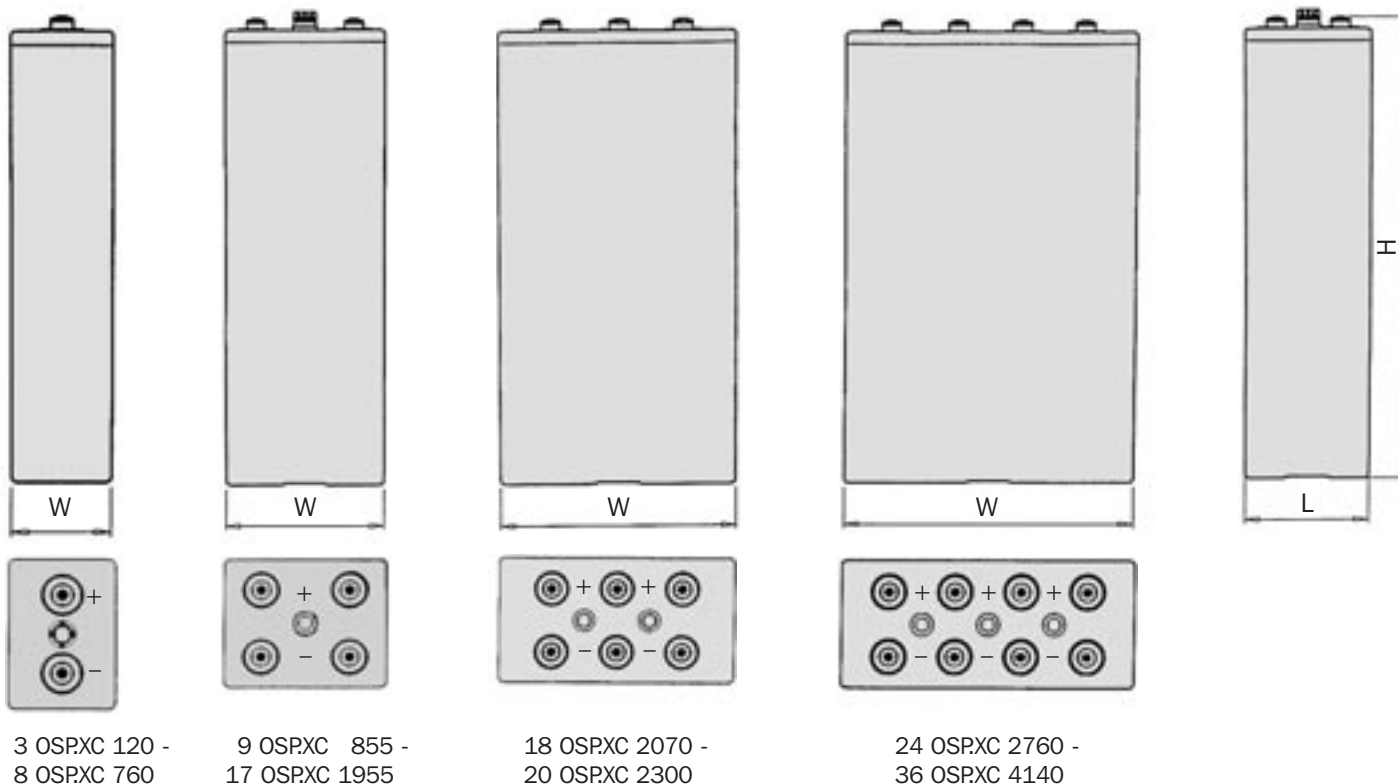

Life expectancy: up to 18 years

Sales and Administration
HOPPECKE Batterien GmbH & Co. KG
 P.O.Box 1140 · D-59914 Brilon
 Bontkirchener Straße 1 · D-59929 Brilon-Hoppecke
 Phone +49 29 63 61-0 · Fax +49 29 63 61-2 70
www.hoppecke.de · info@hoppecke.com

 **HOPPECKE**
POWER FROM INNOVATION